LED T8 tube connection scheme into lamp with fluorescent tube ballast

1

Remove starter.
Don't cut wires,
don't reconnect wires.

2-1

Option 1.
Remove fluorescent tube ballast. Cut off installation wires from the ballast. Connect cut off wires together.

2-2

Option 2.
Leave fluorescent tube ballast. Cut off installation wires from the ballast. Connect cut off wires together.

3

Insert LED T8 tube
into the lamp holders.

Before:

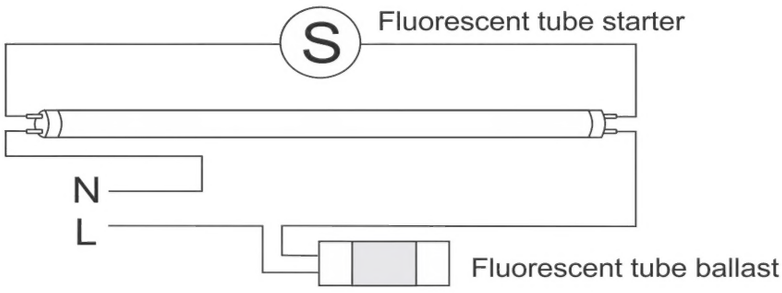

Final connection scheme:

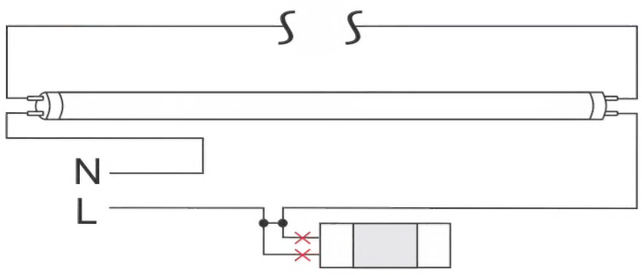

LED T8 tube connection scheme into lamp with electronic fluorescent tube ballast

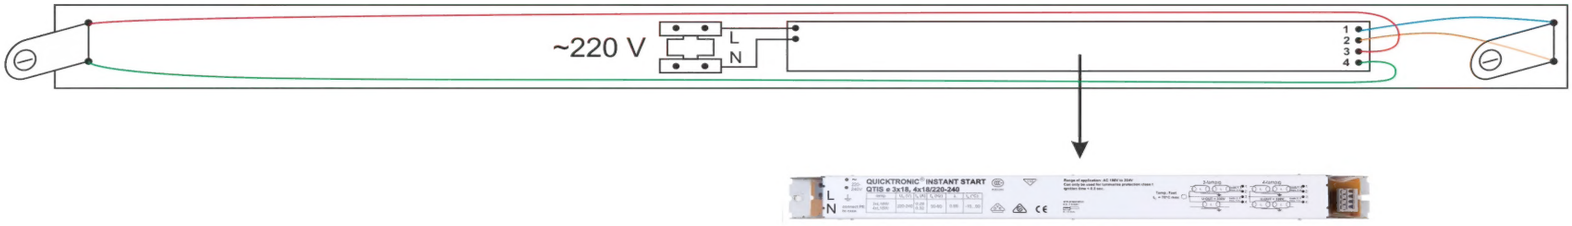

Remove electronic fluorescent tube ballast.
Connect wires so that one end of the lamp will be connected to Live (L), other end to Negative (N).
Connection polarity doesn't matter.

Before:

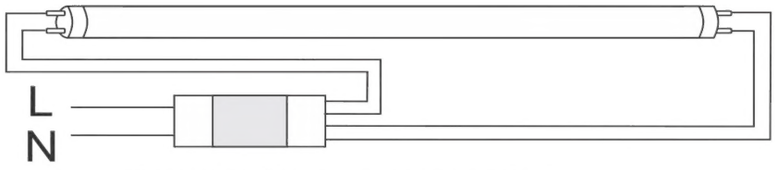

Electronic fluorescent tube ballast

After:

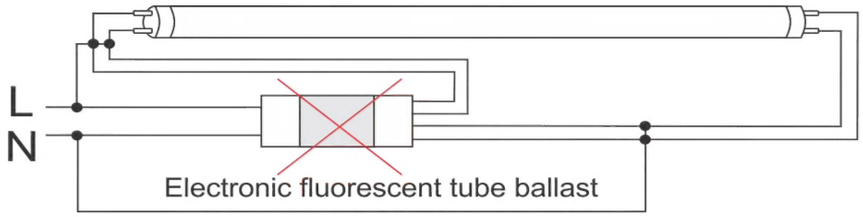

Electronic fluorescent tube ballast
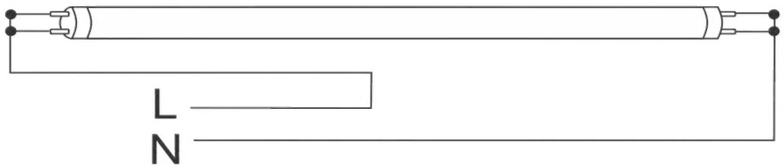
Final connection scheme: